




特長

- 1/2.8" 2MP CMOS sensor
- Fixed lens 3.6mm, F1.8
- Smart IR with 25m effective range
- Corridor mode, ROI
- 3 axis angle adjustment
- MicroSD/SDHC/SDXC card slot up to 128GB
- 2 Alarm in / 1 Alarm out
- IP66 weatherproof

仕様

項目	CB3211
Description	2MP Outdoor IR Mini Bullet
Frame Rate	25fps @ 1920 x 1080
Video Compression	H.265、H.264、MJPEG
Image Sensor	1/2.8" CMOS
Lens	Fixed 3.6mm、F1.8
Horizontal View Angle	82°
IR Illuminators	Smart IR with 25m effective range
Min. Illumination	0.05 lux @ F2.0 / F1.8 (color) 0.005 lux @ F2.0 / F1.8 (B/W)
WDR	D-WDR
Image Settings	Corridor mode、ROI
Audio Support	Two-way (full duplex)
Alarm I/O	2 / 1
Analog Video Output	Yes
RS-485	Yes
ONVIF	2.4 & Profile S
Supported Protocols	IPv4、IPv6、Bonjour、TCP/ IP、DHCP、DNS、DynDNS、PPPoE、ARP、ICMP、FTP、SMTP、NTP、UPnP、RTSP、RTP、RTCP、HTTP、HTTPS、SSL、TCP、UDP
Local Storage	MicroSD/SDHC/SDXC card slot up to 128GB
Power	12V DC、802.3af PoE
Weather/Vandal-proof	IP66 Weatherproof
Operating Conditions	Starting: -10° C - 60° C Working: -30° C - 60° C
Dimensions	φ68 x 180、incl. bracket
Weight	610g
Accessory	AZ-M01 Junction box
Video Management Software	Z+ Free 253ch Management Software

■ 寸法図

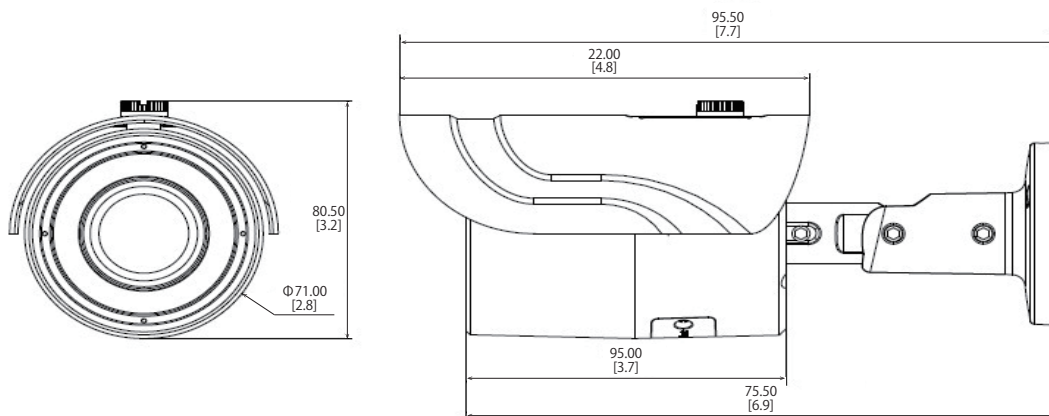

単位 : mm