




特長

- 1/2.8" 2MP CMOS Sensor
- Varifocal 2.8–12mm, F1.6
- Smart IR with 50m effective range
- Corridor mode, ROI
- 3 axis angle adjustment
- MicroSD/SDHC/SDXC card slot up to 128GB
- 2 Alarm in / 1 Alarm out
- IP67 weatherproof

仕様

項目	CB5220
Description	2MP Varifocal Outdoor IR Bullet
Frame Rate	25fps @ 1920 x 1080
Video Compression	H.265、H.264、MJPEG
Image Sensor	1/2.8" CMOS
Lens	Varifocal 2.8–12mm、F1.6 Manual Focus、DC-Iris
Horizontal View Angle	105° – 35°
IR Illuminators	50m effective range
Min illumination	0.01 lux @ F1.6 (color) 0.001 lux @ F1.6 (B/W)
WDR	D-WDR
Image Settings	Corridor mode、ROI
Audio Support	Two-way (full duplex)
Alarm I/O	2 / 1
Analog Video Output	Yes
RS-485	Yes
ONVIF	2.4 & Profile S
Supported Protocols	IPv4、IPv6、Bonjour、TCP/IP、DHCP、DNS、DynDNS、PPPoE、ARP、ICMP、FTP、SMTP、NTP、UPnP、RTSP、RTP、RTCP、HTTP、HTTPS、SSL、TCP、UDP
Local Storage	MicroSD/SDHC/SDXC card slot up to 128GB
Power	12V DC、802.3af PoE
Weather/Vandal-proof	IP67 Weatherproof
Operating Conditions	Starting: -10° C – 60° C Working: -30° C – 60° C
Dimensions	Φ96 x 263mm、incl. bracket
Weight	750g
Accessory	AZ-M01 Junction box
Video Management Software	Z+ Free 253ch Management Software

■ 寸法図

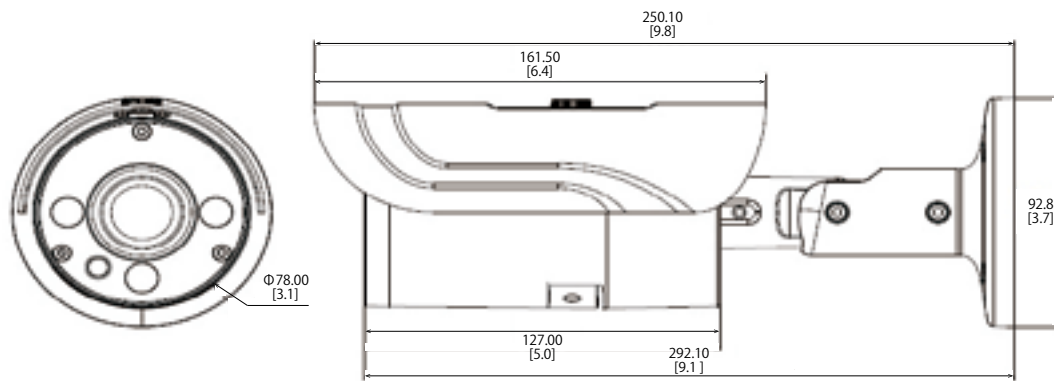

単位 : mm