




特長

- 1/2.8" 3MP CMOS sensor
- Motorized 2.8–12mm, F1.6, P-iris
- Smart Focus
- WDR 120dB
- Smart IR with 35m effective range
- IVS embedded
- Corridor mode, ROI, Defog
- 3 axis angle adjustment
- MicroSD/SDHC/SDXC card slot up to 128GB
- 2 Alarm in / 1 Alarm out
- IP67 weatherproof
- IK10 vandalproof

仕様

項目	CD6330
Description	3MP Motorized Outdoor IR Dome
Frame Rate	30fps @ 2048 x 1536
Video Compression	H.265、H.264、MJPEG
Image Sensor	1/2.8" CMOS
Lens	Motorized 2.8–12mm、 F1.6、Smart Focus、P-iris
Horizontal View Angle	96° – 35°
IR Illuminators	Smart IR with 35m effective range
Min. Illumination	0.01 lux @ F1.6 (color) 0.001 lux @ F1.6 (B/W)
WDR	120dB
Image Settings	Corridor mode、ROI、Defog
Audio Support	Two-way (full duplex)
Alarm I/O	2 / 1
Analog Video Output	Yes
RS-485	Yes
ONVIF	2.4 & Profile S
Supported Protocols	IPv4、IPv6、Bonjour、TCP/IP、DHCP、DNS、DynDNS、PPPoE、ARP、ICMP、FTP、SMTP、NTP、UPnP、RTSP、RTP、RTCP、HTTP、HTTPS、SSL、TCP、UDP
Local Storage	MicroSD/SDHC/SDXC card slot up to 128GB
Power	12V DC、802.3af PoE
Weather/Vandal-proof	IP67 weatherproof IK10 vandalproof
Operating Conditions	Starting: -10° C – 60° C Working: -30° C – 60° C
Dimensions	Φ 118 x 96mm
Weight	696g
Accessory	AD-M06 Wall mount AZ-J01 Junction box
Video Management Software	Free 253 software – Z+

■ 寸法図

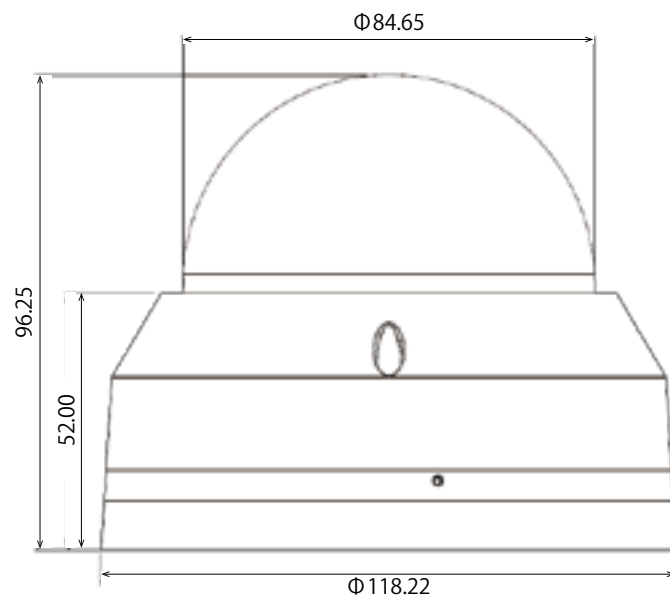

単位 : mm