



特長


- 1/2.8" 2MP Starlight CMOS sensor
- Fixed 2.8mm, F2.0
- WDR 120dB
- Smart IR with 30m effective range
- IVS embedded
- Corridor mode, ROI, Defog
- 3 axis angle adjustment
- Built-in microphone
- MicroSD/SDHC/SDXC card slot up to 128GB
- 1 Alarm in / 1 Alarm out
- IP67 weatherproof
- IK08 vandalproof

仕様

項目	D4220
Description	2MP Outdoor IR Mini Dome
Frame rate	30fps @ 1920 x 1080
Video Compression	H.265、H.264、MJPEG
Image Sensor	1/2.8" Starlight CMOS
Lens	2.8mm、F2.0
Horizontal View Angle	100°
IR Illuminators	Smart IR with 30m effective range
Min. Illumination	0.005 lux @ F2.0 (color) 0.0005 lux @ F2.0 (B/W)
WDR	120dB
Image Settings	Corridor mode、ROI、Defog
Audio Support	Two-way (full duplex) with built-in microphone
Alarm I/O	1 / 1
Analog Video Output	-
RS-485	-
ONVIF	2.4 & Profile S
Supported Protocols	IPv4、IPv6、Bonjour、TCP/IP、DHCP、DNS、DynDNS、PPPoE、ARP、ICMP、FTP、SMTP、NTP、UPnP、RTSP、RTP、RTCP、HTTP、HTTPS、SSL、TCP、UDP
Local Storage	MicroSD/SDHC/SDXC card slot up to 128GB
Power	12V DC、802.3af PoE
Weather/Vandal-proof	IP67 Weatherproof IK08 Vandalproof
Operating Conditions	Starting: -10° C - 60° C Working: -30° C - 60° C
Dimensions	φ 119 x 80mm
Weight	400g
Accessory	AD-J01 Junction box、AD-M05 Wall mount
Video Management Software	Z+ Free 253ch Management Software

■寸法図

Unit: mm

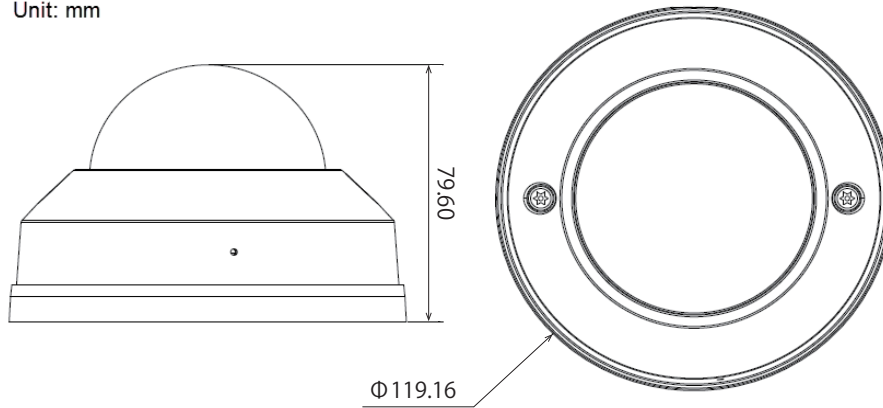

単位 : mm