



## 特徴

- Rack Space: 1U
- Web Client, Mobile Client
- Event trigger, response and notification


## 仕様

| 項目                                | V32  |
|-----------------------------------|--|
| ・ Device                          |  |
| Product Type                      | Rackmount Video Encode   |
| Maximum Number of Cameras         | 16   |
| ・ PTZ                             |  |
| PTZ Control                       | Remote manual control, 32 preset points  |
| Pan, Tilt or Zoom protocol        | Pelco-D, Pelco-P V2, Dynacolor   |
| ・ Video                           |  |
| Compression                       | H.264 (Baseline/ Main/ High profile), MJPEG  |
| Maximum Frame Rate vs. Resolution | 30 fps at 960 x 480 25 fps at 960 x 576 30 fps at 720 x 480 25 fps at 720 x 576  |
| Multi-Streaming                   | Simultaneous dual streams  |
| Bit Rate                          | 28Kbps – 6Mbps (per stream)  |
| Bit Rate Mode                     | Constant, Variable   |
| Image Enhancement                 | Brightness, Saturation, Contrast, Sharpness  |
| Privacy Mask                      | 4 configurable regions   |
| Text Overlay                      | Yes  |
| Server-based Analytics            | Object Based Motion Detection, Tamper, People Counting, Object Line Crossing Detection, Object Enter Area Detection, Missing Object Detection, Unattended Object Detection, Crowd Detection, Vehicle Counting, Heat Map, Automatic License Plate Recognition, Vehicle Speed Detection, Direction Detection, (Require PC-based or standalone IVS or ALPR Server. Contact ACTi support for recommendations on how to maximize analytical accuracy) |
| Image Orientation                 | Flip, Mirror   |
| ・ Audio                           |  |
| Audio Type                        | 2-way, Line-in, Line-out   |
| Audio Compression                 | 8 kHz, Mono, PCM, 16 bit encoding, G.711   |
| ・ Network                         |  |
| Network Protocol & Service        | TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv4/v6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP   |
| Ethernet Port                     | 1 × RJ-45 connector  |
| Security                          | IP address filtering, HTTPS encryption, Password protected user level, IEEE 802.1X network access control, Anonymous login   |

## ■ 仕様

| 項目                         | V32  |
|----------------------------|--|
| ・ Event                    |  |
| Event Trigger              | Video motion detection (3 regions), External device through digital input, Sound detection, Video loss, Video Recovery, Scheduler, Storage removed, Failed to write storage, System is going to reboot, System booted successfully   |
| Event Response             | Notify control center, Go to PTZ preset point or preset tour, Change camera settings, Command other devices, E-mail notification with snapshots, Save video or snapshot to local storage, Upload video or snapshot to FTP server, Activate external device through digital output, Change motion detection profile |
| ・ System                   |  |
| Client PC Operating System | Windows 8.1, Windows 7 SP1, Windows Server 2008 R2 SP1   |
| Mobile Client Program      | Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, iPad, Android device   |
| ・ Integration              |  |
| Unified Solution           | Fully compatible with ACTi software  |
| Software Development Kit   | Yes  |
| GPS Position               | Manual setting   |
| ONVIF Compliant            | Yes, Profile S   |
| Web Browser                | IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.)   |
| ・ Interface                |  |
| Serial Port                | 2, RS-485/RS-422, Terminal block   |
| Audio Interface            | 16/1, Terminal block   |
| Analog Video Input         | 16 X CVBS, BNC connector   |
| Local Storage              | MicroSD, MicroSDHC memory card slot (card not included)  |
| Digital Input/Output       | 16 (DI/DO configurable), Terminal block  |
| ・ General                  |  |
| Power Source               | AC 100-240V  |
| Power Consumption          | 9.36 W (AC)  |
| Weight                     | 1886g (4.16lb)   |
| Dimensions                 | Rack Space: 1U (W × H × D): 444mm × 44.5mm × 142mm (17.5" × 1.8" × 5.6")   |
| Mount Type                 | Rack mounts  |
| Fan                        | Yes  |
| Starting Temperature       | -10°C ~ 50°C (14° F ~ 122° F)  |
| Operating Temperature      | -10°C ~ 50°C (14° F ~ 122° F)  |
| Operating Humidity         | 10% - 85% RH   |
| Remote Access              | Web Client, Mobile Client  |
| Approvals                  | CE, FCC, UL (for bundled power adapter), CB, IEC 60950-1:2005  |
| Real-time Clock (RTC)      | Yes  |

■ 寸法図

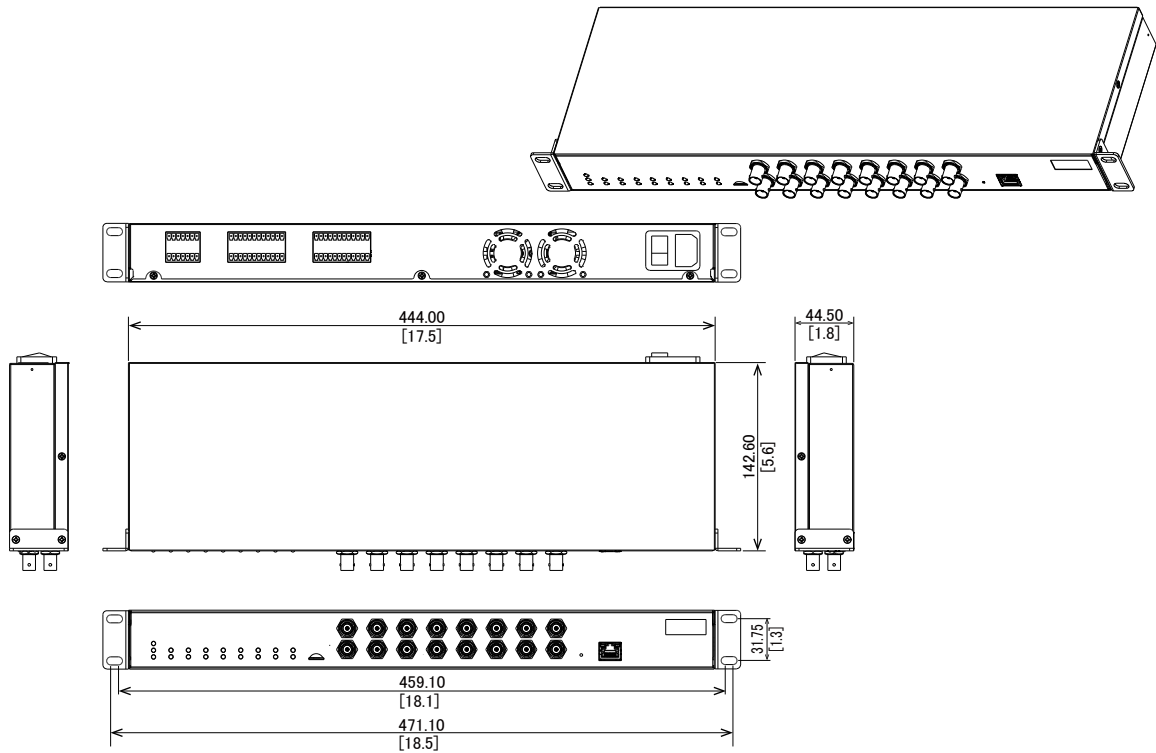

単位 : mm